

APG7400A USB-MCA 4

MADE IN JAPAN

USB bus power, List of 4CH corresponding MCA


MCA

APG7400A is MCA of lightweight compact size equipped with high-speed successive-approximation type ADC on each CH. It operate with USB bus power. Additionally, it is 4CH MCA where the list mode is possible.

- Channel 4CH
- Static Dead Time 1.5μs
- Throughput 50kcps and more
- ADC Gain 16384, 8192, 4096, 2048, 1024, 512ch
- Mode Spectrum, List
- Power USB bus power
- Body Lightweight, Compact aluminum case.
- Interface USB2.0
- Data transfer List data 100kcps/sec and more
- Software Driver & Application




APG7400A USB-MCA 4
(Upper : Front, Under : Rear)

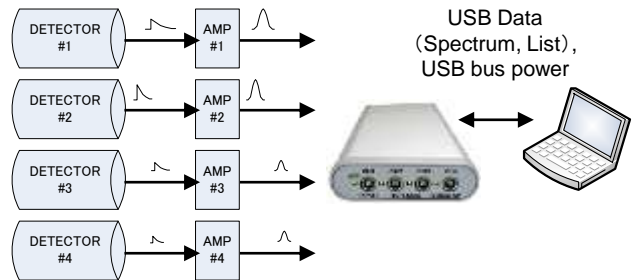

General configuration example.

Specifications

Analog input	4CH LEMO 00 series connector
Input range	0~+10V
Input impedance	1kΩ
Entrant pulse width	100ns (min.) ~ 100μs (max.)
Integral non-linearity	Less than ±0.025%
Differential non-linearity	Less than ±1%
Threshold	0-50% Full-scale from PC
ADC LLD	0-100% Full-scale from PC
ADC ULD	0-100% Full-scale from PC
External Gate Input	LEMO 00 series connector TTL Active High
External VETO Input	LEMO 00 series connector TTL Active Low
LED	POWER, ACCEPT
Interface	USB 2.0 USB mini B receptacle
OS	Windows 7 (32, 64bit) or later
Accessory	CD (Driver, Application) USB cable
External dimensions	70(W) x 160(D) x 20(H) (Unit: mm)
Weight	About 230g

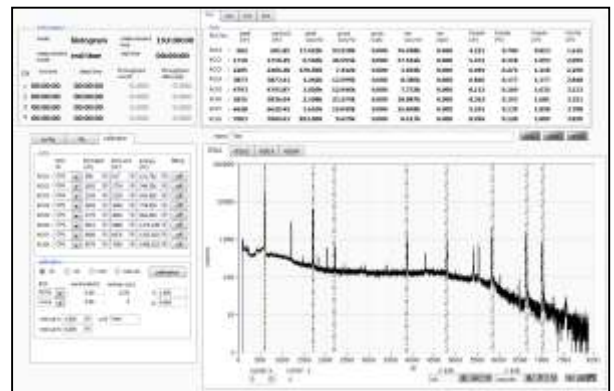

Screen of Application

LIST Data

Event #1	Empty(4bit)	Time(44bit)	CH(2bit)	PHA(14bit)
Event #2	Empty(4bit)	Time(44bit)	CH(2bit)	PHA(14bit)
				:
Event #N	Empty(4bit)	Time(44bit)	CH(2bit)	PHA(14bit)

*Data Size 8Byte/Event, Time 40ns/bit

*Images is for illustration purpose.
*Please note that contents may change without prior notice.

TechnoAP

Design and fabrication of electronic circuit associated with measurement control and radiation measurement

TechnoAP Co., Ltd.

+81-29-350-8011
+81-29-352-9013
2976-15 Mawatari, Hitachinaka-shi, Ibaraki, 312-0012, Japan
<http://www.techno-ap.com>
order@techno-ap.com

Updated on 2017/03/29